
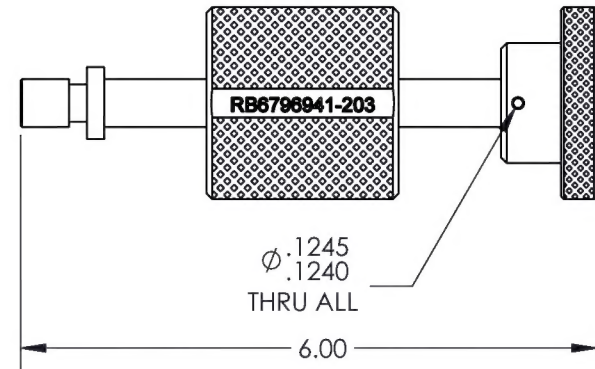


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
F		MADE INDIVIDUAL TOOL DWG. FROM KIT.	7/15/2011	RJC	RW
1		-8 CH'D HOLE LIMITS, -11 ADDED MISSING DIM. & CH'D LIMITS FOR Ø.125 HOLE.	10/24/2011	RJC	RW
1A		-8 CH'D OD WAS Ø.750 IS (Ø.75). -9 ADDED MISSING DIM FOR ENGRAVING FACE.	11/25/2013	CF5	GE
2		-9 CH'D ENGRAVE FLAT DIM WAS .25 IS .30.	6/30/2014	RJC	GE
3	16-0023	-8 MOVED Ø.1240-.1245 THRU ALL HOLE TO ASSEMBLY, CH'D DIMS WAS 6 IS 6.0, WAS 1 IS 1.0. -9 CH'D MATERIAL CALLOUT WAS 1020 IS 1018/1020 CR, CH'D DIM WAS 2 IS 2.0. -11 CH'D MATERIAL CALLOUT WAS 1020 IS 1018/1020 CR. DELETED P.F. & LOCATE AT ASSY. FROM Ø.1250-.1260 HOLE, CH'D DIM WAS .178 IS .18.	2/5/2016	RJC	JAG

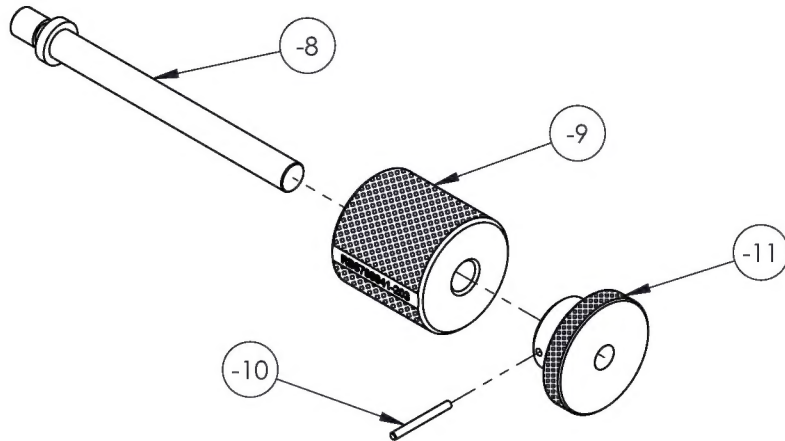





NOTE:
1. ALLISON T63-A-5 ACCESSORY GEARBOX.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-8	1	STUD	41L40		2
			-9	1	HANDLE	1018/1020 CR		3
		B/O	-10	1	DOWEL PIN	STEEL	Ø1/8 X 1-1/4 MCMaster-CARR #98381A477	1
			-11	1	KNOB	1018/1020 CR		4

DART AEROSPACE	
TITLE SLIDE HAMMER ASSY.	
DWG NO. RB6796941-203	REV 3
MAT'L HEAT TREAT FINISH	
SPEC DRAWN BY: COLE CHECKED: DUERFELDT OPPTS APPR: ANDERSON QA APPR: LINDSAY APPROVED: GILBERT	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 SURFACES = 125° 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
USED ON MODEL R.R. ALLISON T63-A-5	
SCALE 1:2	DATE 7/17/2000
SHEET 1 OF 4	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		-8 CH'D HOLE LIMITS.	10/24/2011	RJC	RW
1A		-8 CH'D OD WAS Ø.750 IS (Ø.75).	11/25/2013	CFS	GE
3	16-0023	-8 MOVED Ø.1240-.1245 THRU ALL HOLE TO ASSEMBLY, CH'D DIMS WAS 6 IS 6.0, WAS 1 IS 1.0.	2/5/2016	RJC	JAG

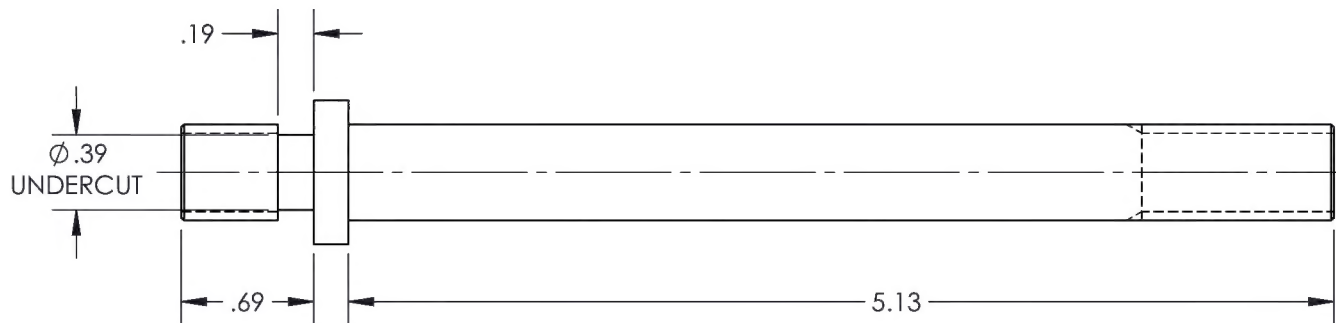
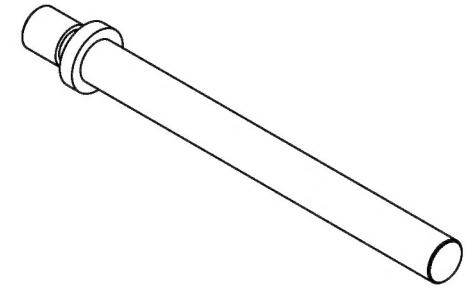
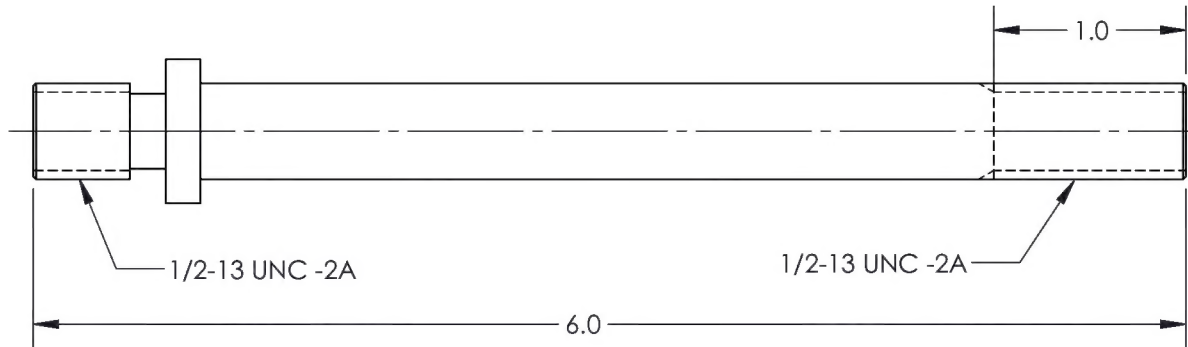


(-8)
STUD

DART AEROSPACE	
TITLE SLIDE HAMMER ASSY.	
DWG NO. RB6796941-203-8	REV 3
MAT'L 41L40	UNLESS OTHERWISE SPECIFIED
HEAT RC 32-36	DIMENSIONS ARE IN INCHES
FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: COLE	1. BREAK ALL SHARP EDGES
CHECKED: DUERFELDT	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
SCALE 1:1	DATE 7/17/2000
	SHEET 2 OF 4

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1A		-9 ADDED MISSING DIM FOR ENGRAVING FACE.	11/25/2013	CFS	GE
2		-9 CH'D ENGRAVE FLAT DIM WAS .25 IS .30.	6/30/2014	RJC	GE
3	16-0023	-9 CH'D MATERIAL CALLOUT WAS 1020 IS 1018/1020 CR, CH'D DIM WAS 2 IS 2.0.	2/5/2016	RJC	JAG



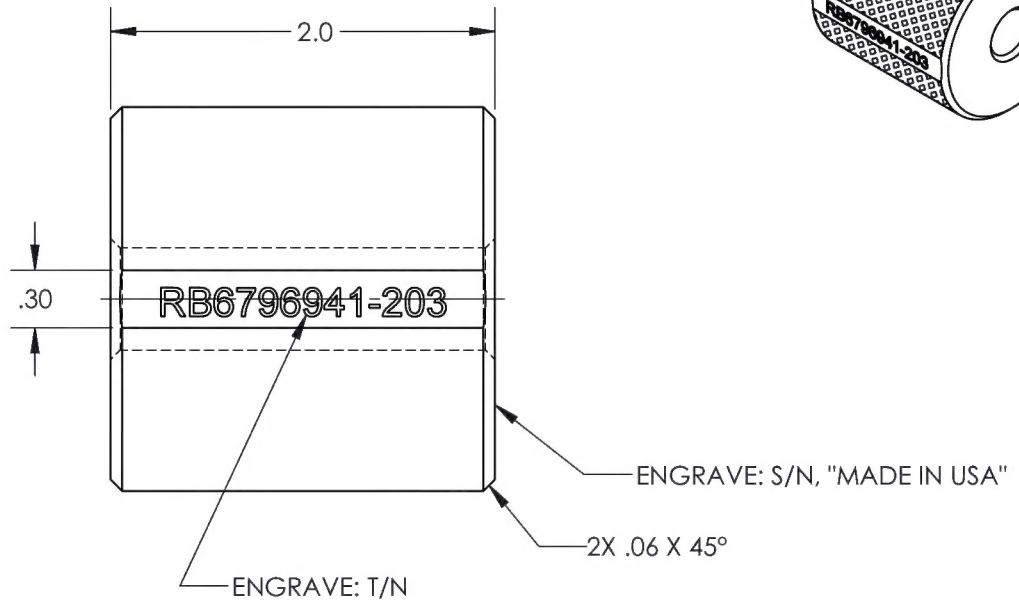
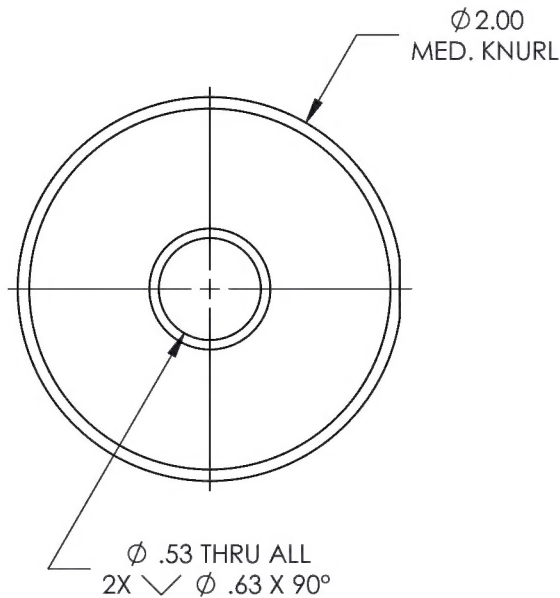


(-9)
HANDLE

DART AEROSPACE	
TITLE SLIDE HAMMER ASSY.	
DWG NO. RB6796941-203-9	REV 3
MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH BLACK OXIDE	.XXX \pm .005 FRACTIONS \pm 1/8
SPEC	.XX \pm .01 ANGLES \pm 5°
DRAWN BY: COLE	.X \pm .1 SURFACES = 125✓
CHECKED: DUERFELDT	1. BREAK ALL SHARP EDGES
OPPS APPR: ANDERSON	.015 x 45° OR .015R
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY
APPROVED: GILBERT	AFTER PLATING
SCALE 1:1	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
DATE 7/17/2000	USED ON MODEL
SHEET 3 OF 4	R.R. ALLISON T63-A-5

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		-11 ADDED MISSING DIM. & CH'D LIMITS FOR Ø.125 HOLE.	10/24/2011	RJC	RW
3	16-0023	-11 CH'D MATERIAL CALLOUT WAS 1020 IS 1018/1020 CR. DELETED P.F. & LOCATE AT ASSY. FROM Ø.1250-.1260 HOLE, CH'D DIM WAS .178 IS .18.	2/5/2016	RJC	JAG

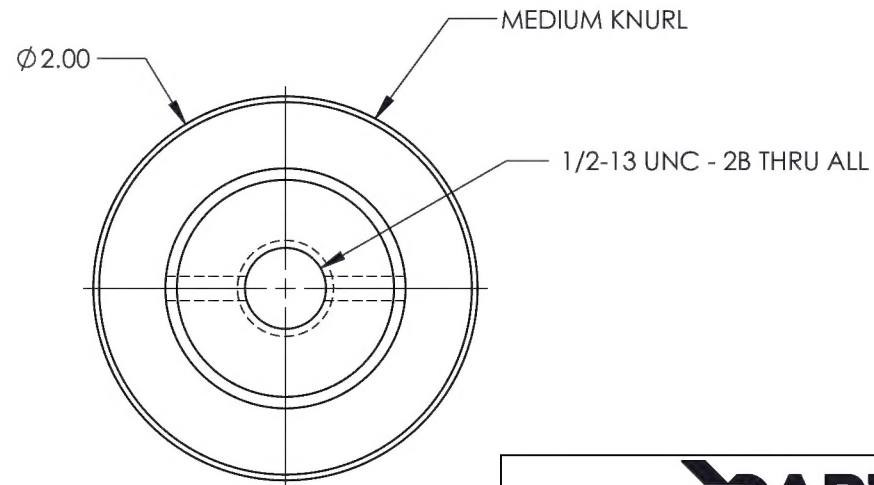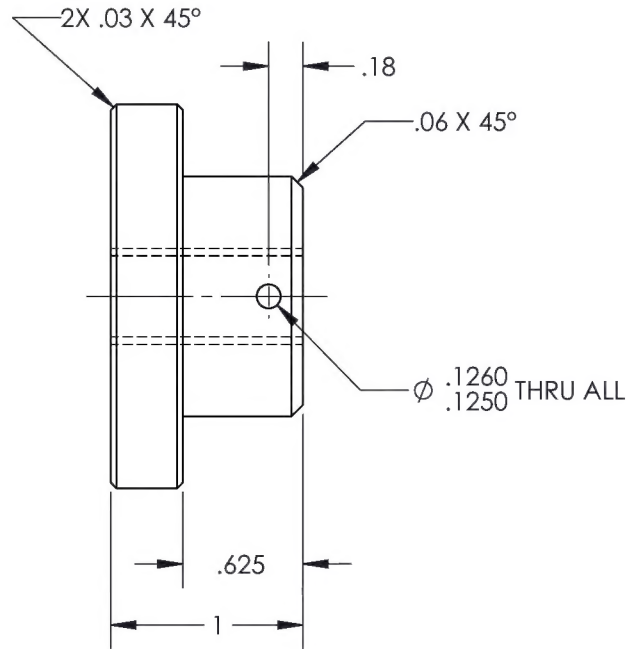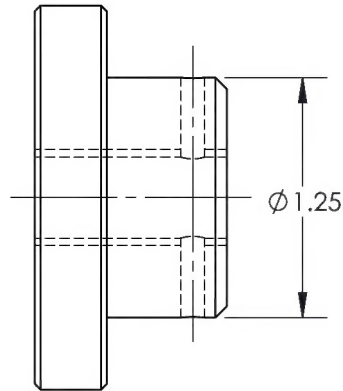

(-11)

KNOB

DART AEROSPACE	
TITLE SLIDE HAMMER ASSY.	
DWG NO. RB6796941-203-11	REV 3
MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: COLE	1. BREAK ALL SHARP EDGES
CHECKED: DUERFELDT	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	R.R. ALLISON T63-A-5
SCALE 1:1	DATE 7/17/2000
	SHEET 4 OF 4